



FIG. 1

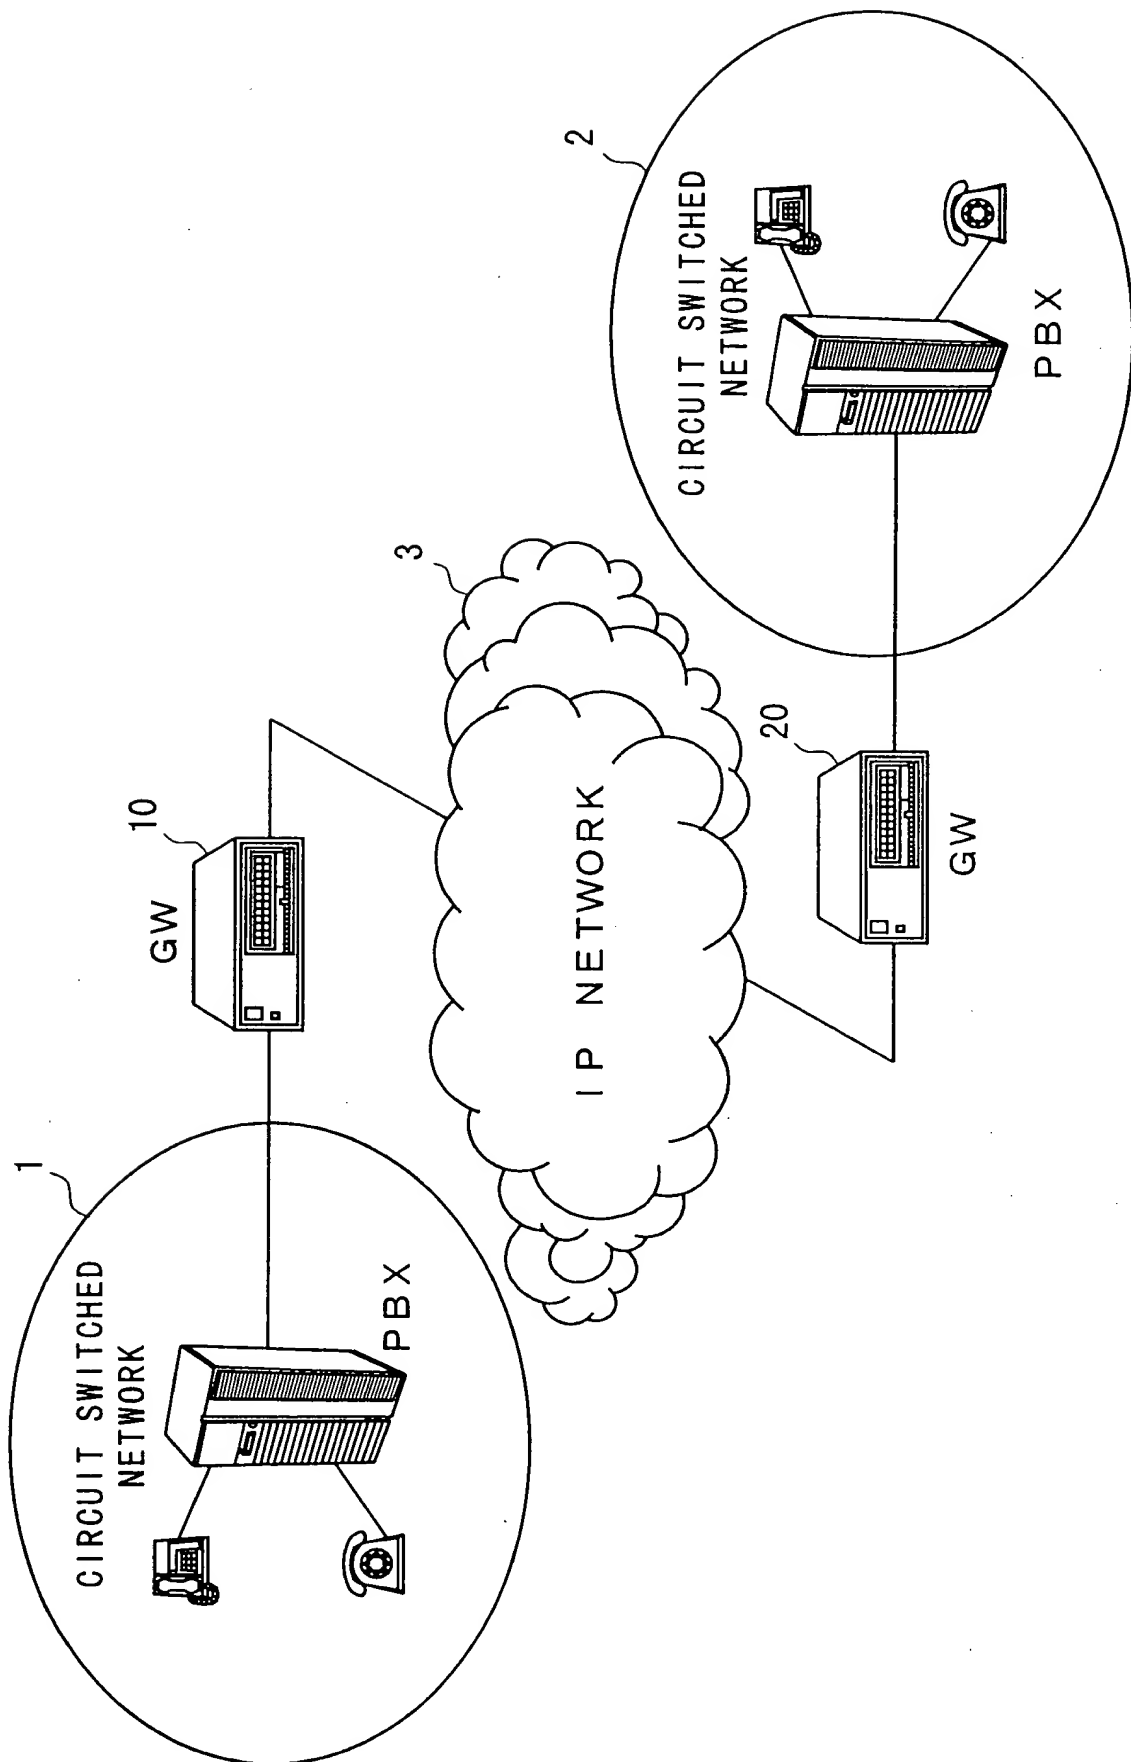

SECRET 2067460

FIG. 2

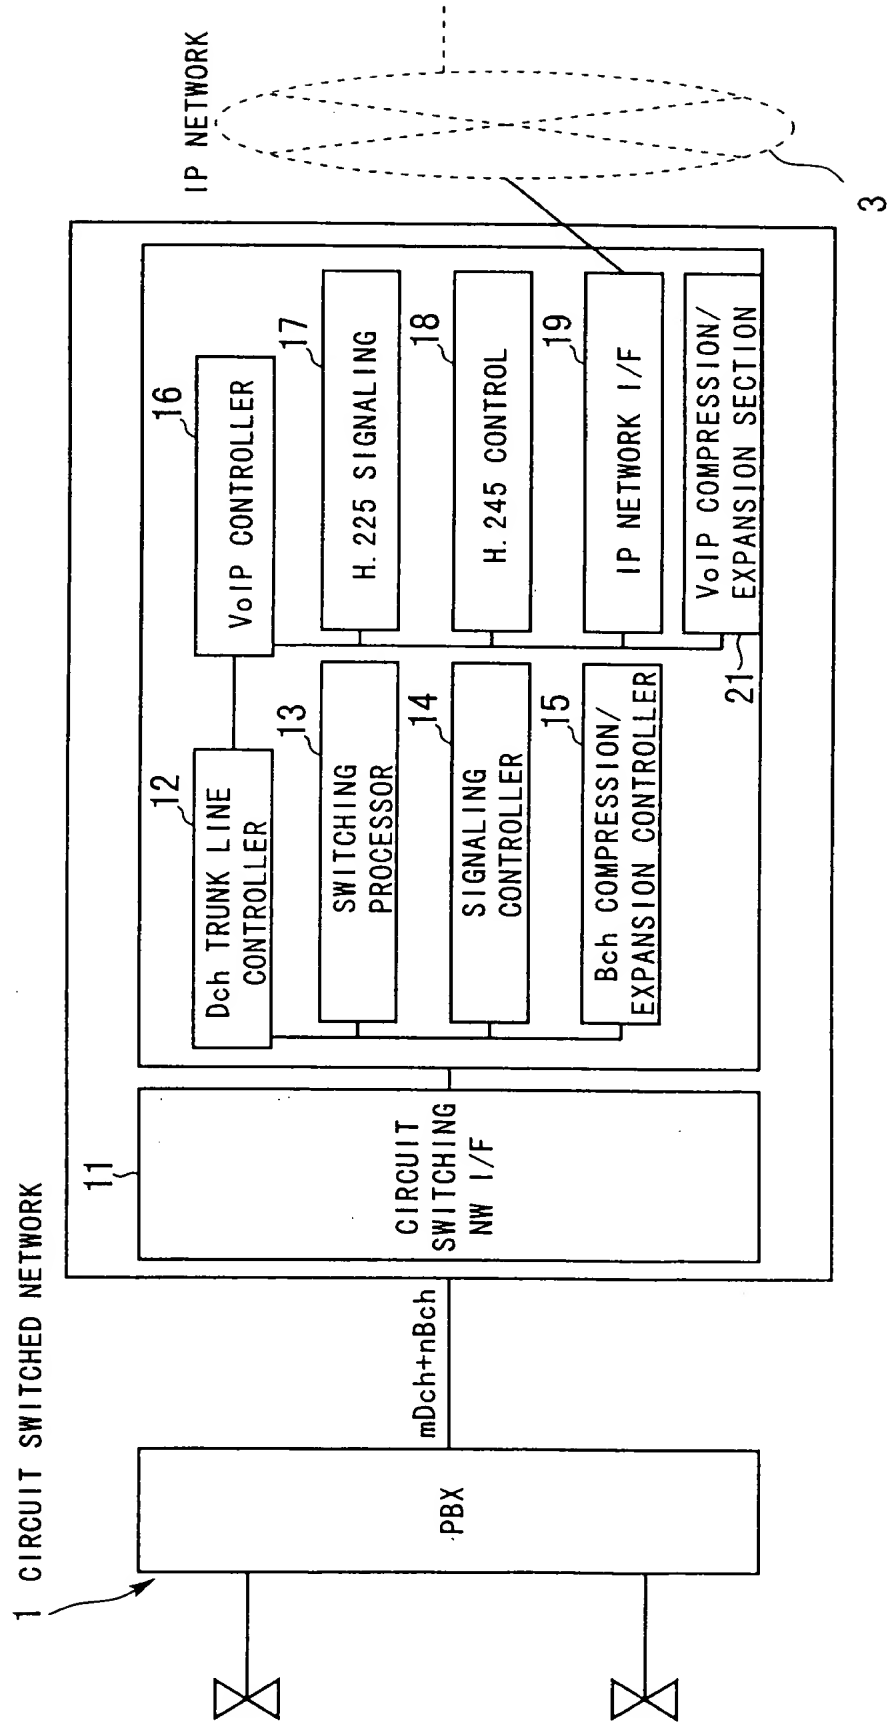

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

SECRET

FIG. 3

Dch TRUNK LINE SETUP INFORMATION ELEMENT H. 225 SETUP INFORMATION ELEMENT

(a)

PROTOCOL IDENTIFIER (Q. 931)	
	CALL NUMBER LENGTH
F	CALL NUMBER
	SET UP
TRANSMISSION CAPABILITY INFORMATION ELEMENT	
CHANNEL IDENTIFICATION INFORMATION ELEMENT	
CALL-IN SIDE NUMBER INFORMATION ELEMENT	
LOW-ORDER LAYER MATCHING PROPERTY INFORMATION ELEMENT	
HIGH-ORDER LAYER MATCHING PROPERTY INFORMATION ELEMENT	

(b)

TRANSMISSION CAPABILITY INFORMATION ELEMENT IDENTIFIER	
TRANSMISSION CAPABILITY CONTENT LENGTH	
E	CODING STANDARD
	INFORMATION TRANSFER CAPABILITY
E	TRANSFER MODE
	INFORMATION TRANSFER RATE
TRANSMISSION CAPABILITY INFORMATION ELEMENT	

(c)

SET UP
TRANSMISSION CAPABILITY ELEMENT
CALL-OUT SIDE SUB-ADDRESS
CALL-IN SIDE SUB-ADDRESS
UUI

```

sequenceDiagram
    participant GW10
    participant GW20

    Note over GW10: H.245TerminalCapabilitySet (CALL-OUT SIDE)  
ENABLE CODEC:ALL CODEC HOLDING  
CALL-OUT SIDE GATEWAY
    GW10->>GW20: H.245TerminalCapabilitySet (CALL-OUT SIDE) (S11)
    Note over GW20: H.245TerminalCapabilitySet (CALL-IN SIDE)  
(CALL-OUT SIDE→CALL-IN SIDE)  
ENABLE CODEC:8-Kbps LINEAR  
COMPRESSION
    GW20->>GW10: H.245RemainInCapabilitySetAck (S12)
    Note over GW10: H.245TerminalCapabilitySet (CALL-IN SIDE) (S13)
    GW10->>GW20: H.245RemainInCapabilitySetAck (S14)
    Note over GW20: H.245openLogicalChannel (S15)
    GW20->>GW10: H.245openLogicalChannelAck (S16)
    Note over GW10: H.245RequestMode (CALL-OUT SIDE→CALL-IN SIDE) (S17)  
H.245RequestModeAck (CALL-OUT SIDE→CALL-IN SIDE) (S18)
    GW10->>GW20: H.245RequestMode (CALL-OUT SIDE→CALL-IN SIDE) (S17)
    Note over GW20: H.245openLogicalChannel (S19)
    GW20->>GW10: H.245openLogicalChannelAck (S20)
    Note over GW10: H.245RequestMode (CALL-OUT SIDE→CALL-IN SIDE) (S21)  
H.245RequestModeAck (CALL-OUT SIDE→CALL-IN SIDE) (S22)
    GW10->>GW20: H.245RequestMode (CALL-OUT SIDE→CALL-IN SIDE) (S21)
    Note over GW20: H.245RequestMode (CALL-OUT SIDE→CALL-IN SIDE)  
(CODEC FOR CALL-OUT SIDE→CALL-IN SIDE PAYLOAD:8-Kbps LINEAR  
COMPRESSION)
  
```

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

CALL-OUT SIDE GATEWAY CALL-IN SIDE GATEWAY

FIG. 5

PRIOR ART


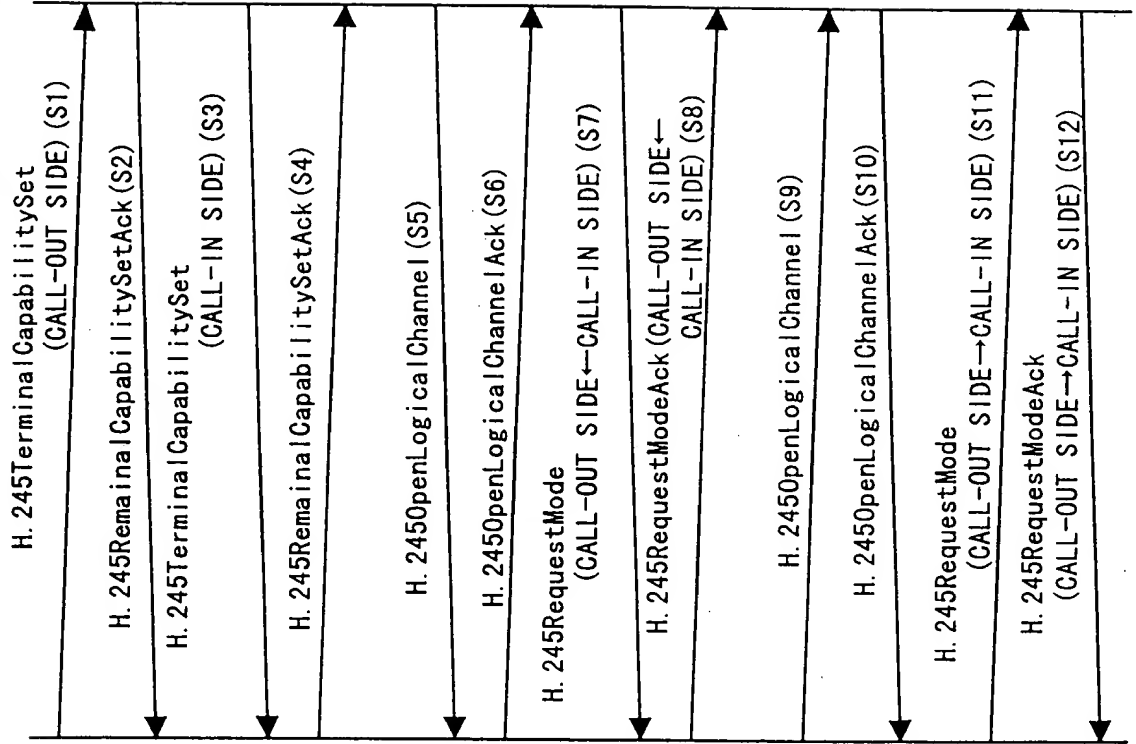


FIG. 6
PRIOR ART

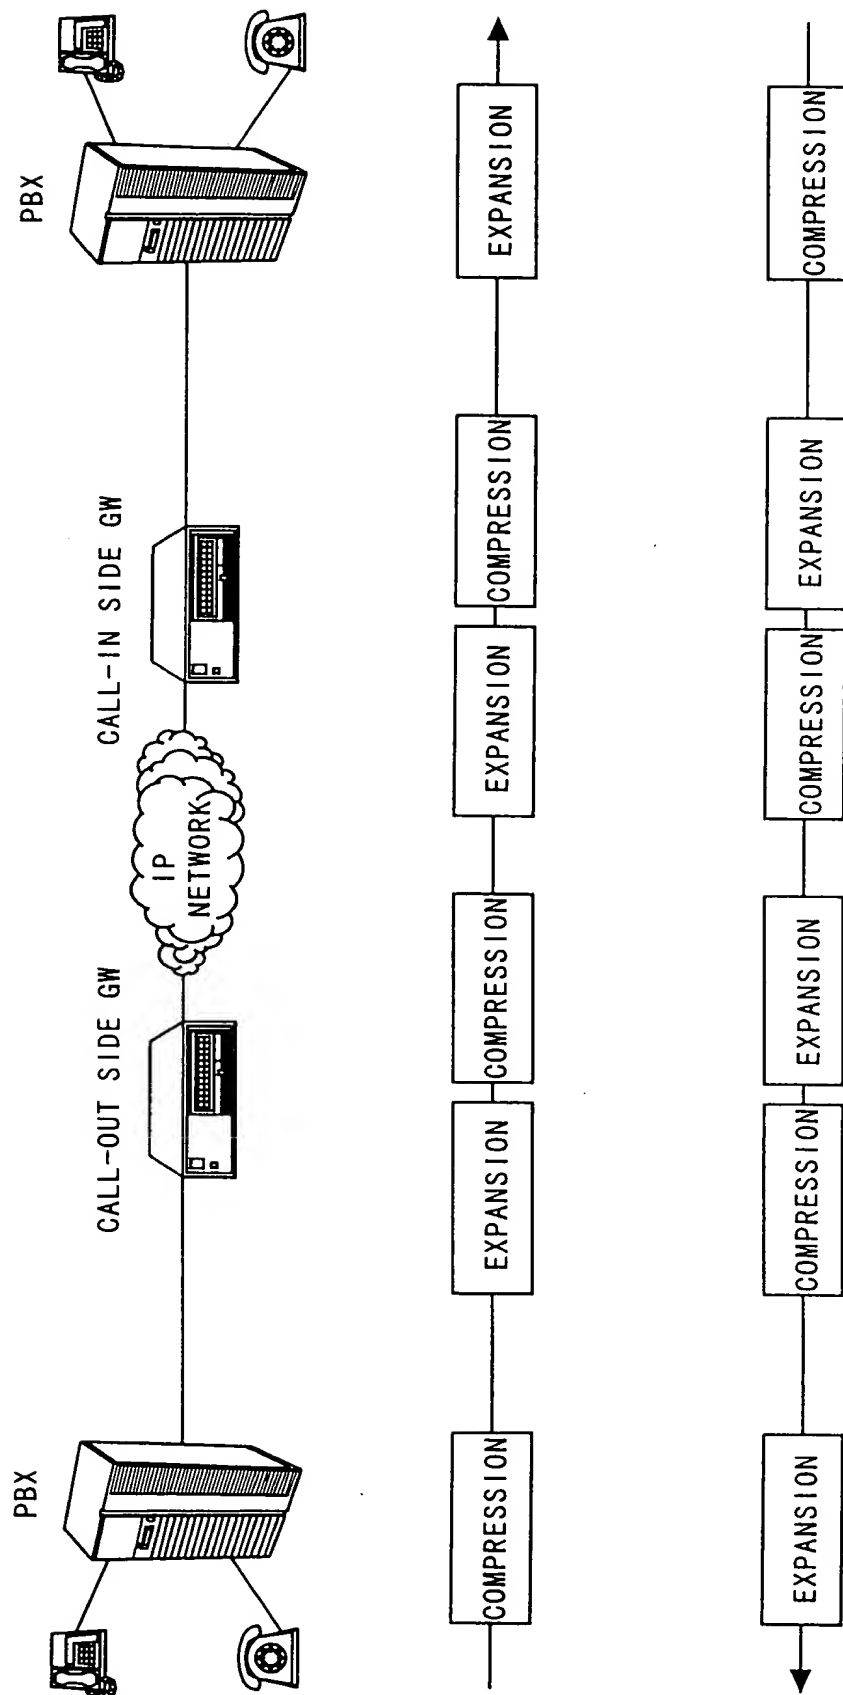

66011 206 F 450